

1


2

3

REVISION HISTORY

REV	DESCRIPTION	DATE	APPROVED

EXTENSION TUBE LENGTH OPTIONS	
14070	Extension Tube, 12 Inch Length
14071	Extension Tube, 36 Inch Length
14072	Extension Tube, 48 Inch Length
14073	Extension Tube, 60 Inch Length

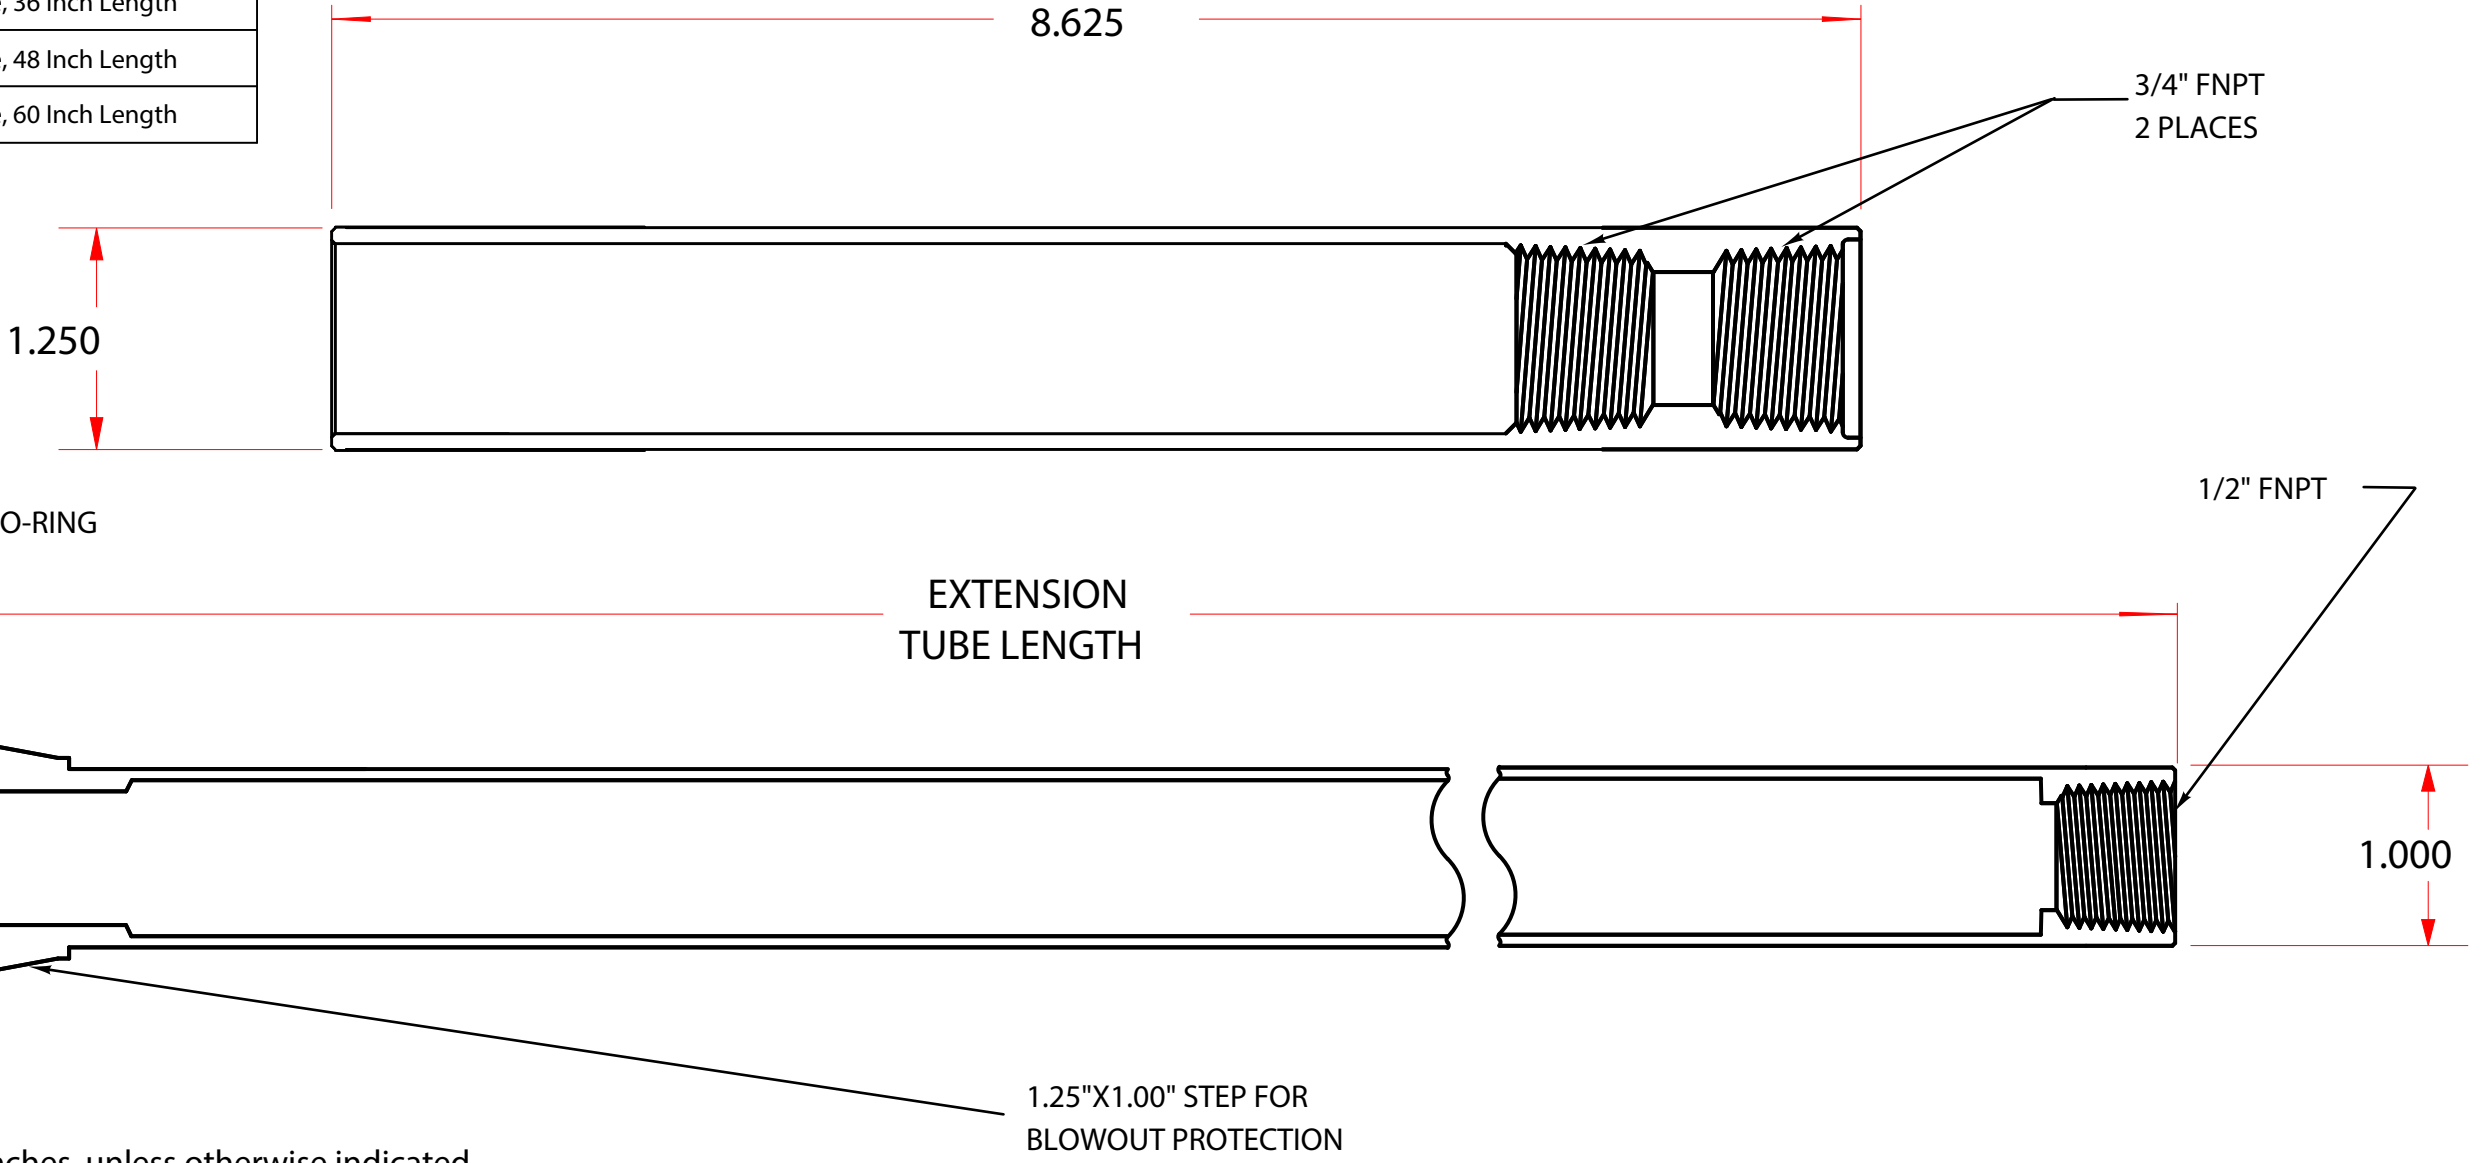


NOTES

1. All dimensions are in inches, unless otherwise indicated.
2. Material of construction is 316L Stainless Steel, others available upon request (as special orders).
3. Only use with Turtle Tough sanitary series sensors. See procedures for proper insertion of sensor into holder.
4. 3GVR-316SS-HOLDER sensor holder for HOT-TAP valve retractable installations is shown on top (Item # 14069).
5. Extension tube part number is 3GVR-316SS-EXT-XX" where XX is the desired length in inches of the tube.

TOLERANCES	
1 Place: ± .1	3 Places: ± .005
2 Places: ± .01	4 Places: ± .0005
Angular: ± 0.25°	

DRAWN BY RH
CHECKED BY TADP
APPROVED BY MJP

 TURTLE TOUGH		Turtle Tough Sensors www.turtletough.com.au	
TITLE HOT-TAP Holder w/ Extension Tube Cross Section			
SIZE B	PROJECT SAN / VR	DRAWING NO. HOLDER-TUBE-X-View	REV /
SCALE Not to Scale	MODEL Various	SHEET 1	OF 1

1

2

3

1

2

3

REVISION HISTORY

REV	DESCRIPTION	DATE	APPROVED

ITEM #	EXTENSION TUBE LENGTH OPTIONS	PART NUMBER
14070	Extension Tube, 12 Inch Length	3GVR-316SS-EXT-12"
14071	Extension Tube, 36 Inch Length	3GVR-316SS-EXT-36"
14072	Extension Tube, 48 Inch Length	3GVR-316SS-EXT-48"
14073	Extension Tube, 60 Inch Length	3GVR-316SS-EXT-60"

"O" RING, AS 568-212

LENGTH

LENGTH

1.25"X1.00" STEP FOR BLOWOUT PROTECTION

8.625"

9.625"

3GVR-316SS-HOLDER sensor holder for HOT-TAP valve retractable installations (Item # 14069)

NOTES

1. All dimensions are in inches, unless otherwise indicated.
2. Material of construction is 316L Stainless Steel, others available upon request (as special orders)
3. O-ring material of construction is Viton-75, others upon request
4. Only use with Turtle Tough sanitary series sensors.
See procedures for proper insertion of sensor into holder.
5. Max pressure 100 psig, max temp 150 deg Celsius.
Do not use any sensor beyond specified limits.
6. HOT-TAP ball valve retractable assembly must be installed at an angle as shown (minimum 15 degrees below horizontal).

TOLERANCES	
1 Place: ± .1	3 Places: ± .005
2 Places: ± .01	4 Places: ± .0005
Angular: ± 0.25°	

DRAWN BY
RH

CHECKED BY
TADP

APPROVED BY
MJP



Turtle Tough Sensors
www.turtletough.com.au

TITLE
HOT-TAP Holder with Extension Tube - Isometric

SIZE	PROJECT	DRAWING NO.	REV
B	SAN / VR	HOLDER-TUBE-ISO	/

SCALE	MODEL	SHEET	OF
Not to Scale	Various	1	1

1

2

3

A

A

B

B